



SECURITY



MP500

MULTIFUNCTION INTEGRATED SYSTEM



EN50131 certified
Grade 3

ELKRON
The key to security



MP500 SYSTEM

ELKRON QUALITY IN A VERSATILE AND RELIABLE INTRUSION ALARM SYSTEM.

The Elkrone MP500 system is the ideal solution for scalable intrusion alarm installations in residential, business or industrial environments. It can be managed remotely from a PC, tablet or smartphone and can be integrated with video surveillance cameras.

A complete range of control panels

MP500/4N: control panel with 4 inputs expandable up to 32, assignable to 4 independent sectors.

MP500/8: control panel with 8 inputs expandable to 64, assignable to 8 independent sectors.

MP500/16: control panel with 8 inputs expandable to 128, assignable to 16 independent sectors.

A system that is always connected

Each MP500 control panel can manage two telephone communicators, PSTN and GSM/GPRS, one backing up the other. This increases the assurance that alarm communications can reach law enforcement or a monitoring station. Users can also interact remotely with the system using telephone tones or SMS commands. The control panels can be managed by app through two different interfaces.

A system for every requirement

The modularity of the Elkrone system allows the same peripheral devices (readers and keypads) to be used with every control panel in the range. The system can be expanded as required through wired or wireless expansions.

Certified quality and performance



To ensure reliability, the control panel range is IMQ certified in accordance with European standard EN50131.

Endless possibilities through integration with other systems

MP500 control panels can manage video functions through IP cameras. They can also manage technological alarms such as flooding, medical assistance or fire alarms, making the system increasingly open to any type of customization.

MORE FLEXIBLE, HIGHER PERFORMANCE, MORE EXPANDABLE

The system's many continuously updated features allow MP500 to be used in installations requiring integrated control capabilities. These include wireless expansion for hybrid systems, an auxiliary power supply with bus signal repeater, remote programming and user control via app.



Wired/wireless expandability

The ER600 interface allows wireless detectors and sirens to be connected to the intrusion alarm system, expanding the system without additional wiring.



Local and/or remote programming

Using HI-CONNECT software, the installer can configure how the control panel connects to the Internet.



Configuration

Updates / transfer of configuration and programming between PC and control panel.



Multiple communication paths

The control panel can manage up to three communication paths (PSTN / GSM-GPRS / LAN) for alarm transmission.



Integrable HD IP/Wi-Fi cameras

Optional interfaces allow up to 8 IP/ Wi-Fi cameras to be integrated into the intrusion alarm system.



Alarm messages

Pre-recorded voice messages and/or alarm SMS with identification of the individual input. Notifications on the user app.

FUNCTIONALITY AND DESIGN IN A SINGLE KEYPAD



KP500D/ST keypad

Tempered glass surface, OLED display and capacitive "Soft Touch" technology.


A clean, modern design that blends discreetly into any interior, enhancing what used to be an element to hide: the intrusion alarm keypad.

ER600 RADIO EXPANSION

The ER600 radio expansion converts an MP500 control panel into a hybrid wired/wireless system. Each ER600 radio expansion can manage up to:

- ✓ 16 detectors
- ✓ 2 outdoor sirens
- ✓ 8 remote controls
- ✓ 8 wireless keypads.

The ER600 expansion uses an ultra-fast narrow-band FSK bidirectional radio protocol, providing a range of up to 2 km in open air and increasing the average peripheral-device battery life to 5 years*.

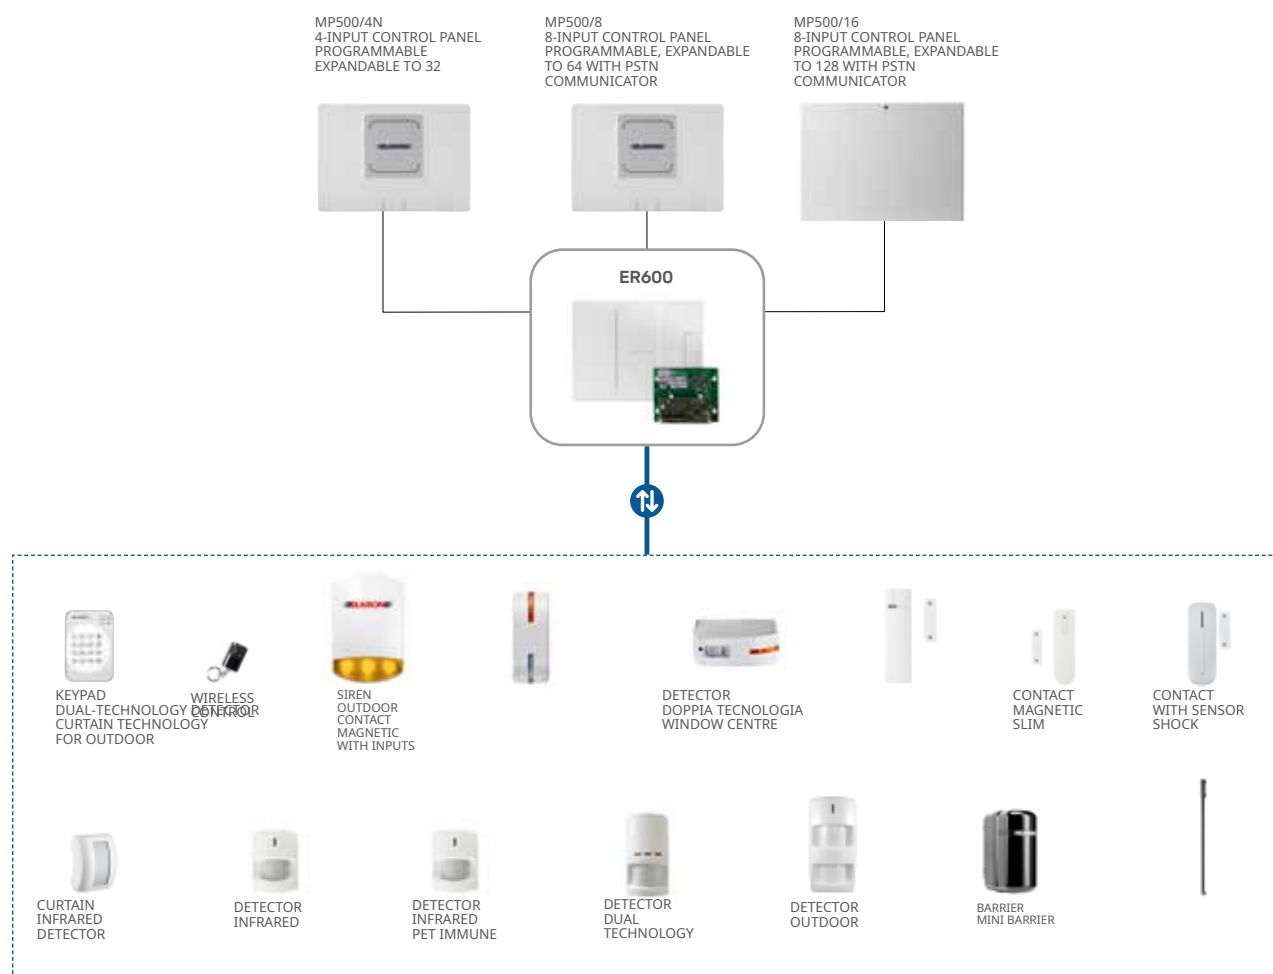

* Consumption calculated for a system consisting of 4 micro-contacts with auxiliary inputs, 2 indoor detectors and 1 outdoor siren under normal operating conditions.

REMOTE CONTROL FOR USER AND INSTALLER

With MP500, controlling the system is quick and easy. A dedicated web interface installed in the control panel and registered on the My Elkron Home portal lets the user interact with the system via smartphone or tablet using the free MY Elkron Home app.



Installer control

The IT500WEB interface, compatible with MP500/4N, MP500/8 and MP500/16 control panels, connects the control panel to the home modem/router via Ethernet. Using HI-CONNECT software, the installer can configure IT500WEB and connect locally or remotely to manage the system.

Remote management of MP500 system functions via app
My Elkron Home is the app for remote control of MP500 intrusion alarm systems from tablets and smartphones. It works with all three Elkron MP500 control panels equipped with a web server and allows multiple systems to be controlled through a secure connection.



Available functions



Antintrusione

- ✓ System status display
- ✓ Arm / Disarm / Partial arming
- ✓ View event log
- ✓ Bypass / restore inputs
- ✓ Set date - time
- ✓ Enable / Disable Time scheduler
- ✓ Enable / Disable technician, users, keys
- ✓ Enable / Disable Remote access
- ✓ Edit telephone no. / event association
- ✓ System check



Home automation

Switching the remotely controllable outputs of the control panel. This integration can, for example, in the event of an alarm:

- ✓ Control actuators and door locks
- ✓ Switch indoor or outdoor lights
- ✓ Create associations



Video surveillance

- ✓ Manage up to 8 surveillance cameras
- ✓ Display up to 8 cameras (4+4) at 1 fps
- Send e-mails with photo attachments - notification with direct access to alarm images saved on the IT500WEB board.

REMOTE CONTROL FOR THE USER

New My Elkron Family app

My Elkron Family is the new simple and intuitive app designed for systems with an MP500/8 control panel, allowing the end user to manage intrusion and video functions. At any time, the app can check the alarm system status, arm or disarm it, and remotely view images from the cameras.



Antintrusione

- The app can manage the system; fully and/or partially
- ✓ Enable/disable users
 - ✓ Exclude selected sensors
 - ✓ Send commands to an output
 - ✓ View the event log
 - ✓ Receive notifications.
 - ✓
 - ✓



Geolocalization

Detecting the user's position relative to the control panel enables automatic commands based on moving away from or approaching the home. For example, the system can be armed simply by leaving home or disarmed when approaching it, after confirmation requested by the app.



Cameras

- The app can manage cameras integrated with the intrusion alarm. The video function allows you to:
- ✓ View up to 8 IP cameras live
 - ✓ Automatically display live video on alarm
 - ✓ Review recordings in playback mode after an alarm
 - ✓ View the recording history.
 - ✓
 - ✓

Easy to install

The IT500CLOUD interface connects to the system bus and to the home modem/router via LAN or Wi-Fi. QR-code acquisition and guided automatic configuration make commissioning extremely simple. In the same way, a video recorder can be acquired and commissioned; market IP cameras can be connected to it, or it can be used to manage individual Elkron TC19 and TC20 cameras.

CONTROL PANEL RANGE

The wide range of functions allows the system to be used flexibly at home, in companies and in shops, always ensuring high security levels.



MP500/4N
Example: home - office

Control panel: Elkron MP500/4N with 4 inputs expandable to 32, 2 basic outputs expandable to 11, control keypad
Outputs: 1 outdoor siren
Inputs: 3 magnetic contacts for entrance door/windows, 1 volumetric detector



MP500/8
Example: shop - warehouse

Control panel: Elkron MP500/8 with 8 inputs expandable to 64, 6 outputs expandable to 27, control keypad
Outputs: 1 indoor siren, 1 outdoor siren
Inputs: 2 magnetic contacts, 2 glass-break detectors, 2 roller-shutter detectors, 2 volumetric detectors



MP500/16
Example: multipurpose facility

Control panel: Elkron MP500/16 with 8 inputs expandable to 128, 6 outputs expandable to 51, keypads managing 3 independent areas
Expansions: AS500/RPT bus repeater with integrated expansion, 8 inputs and 3 outputs for home automation connection
Outputs: 3 outdoor sirens, 3 indoor sirens
Inputs: 20 magnetic contacts, 48 volumetric detectors, 20 infrared barriers, 12 outdoor microwave barriers



MP500/4N
item no.
80MP1N00111



MP500/8
item no.
80MP4L00111




MP500/16
item no.
80MP5L00111

FEATURES


	MP500/4N item no. 80MP1N00111	MP500/8 item no. 80MP4L00111	MP500/16 item no. 80MP5L00111
BASIC / EXPANDABLE INPUTS	4/32	8/64	8/128
BASIC / EXPANDABLE OUTPUTS	2/11	6/27	6/51
PSTN TRANSMITTER	Option (ILT500-N)	YES	YES
MULTIPROTOCOL DIGITAL TRANSMISSION	YES	YES	YES
VOICE MESSAGE TRANSMISSION	Option (SV500)	Option (SV500)	Option (SV500)
TIME SCHEDULER	YES	YES	YES
GSM / GPRS TRANSMISSION	Option (IMG500/N)	Option (IMG500/N)	Option (IMG500/N)
LCD KEYPAD	YES	YES	YES
SOFT TOUCH KEYPAD	YES	YES	YES
WIRELESS EXPANSION	YES	YES	YES
SYSTEM PARTITIONING INTO SECTORS	4	8	16
SYSTEM PARTITIONING INTO AREAS	2	4	4
WEB SERVER INTERFACE	Option (IT500WEB)	Option (IT500WEB)	Option (IT500WEB)
CLOUD INTERFACE	NO	Option (IT500CLOUD)	NO
EVENT LOG MANAGEMENT	1000 events	1000 events	1000 events
EN50131 CERTIFICATION	Grade 2	Grade 3	Grade 3

MP500 SYSTEM

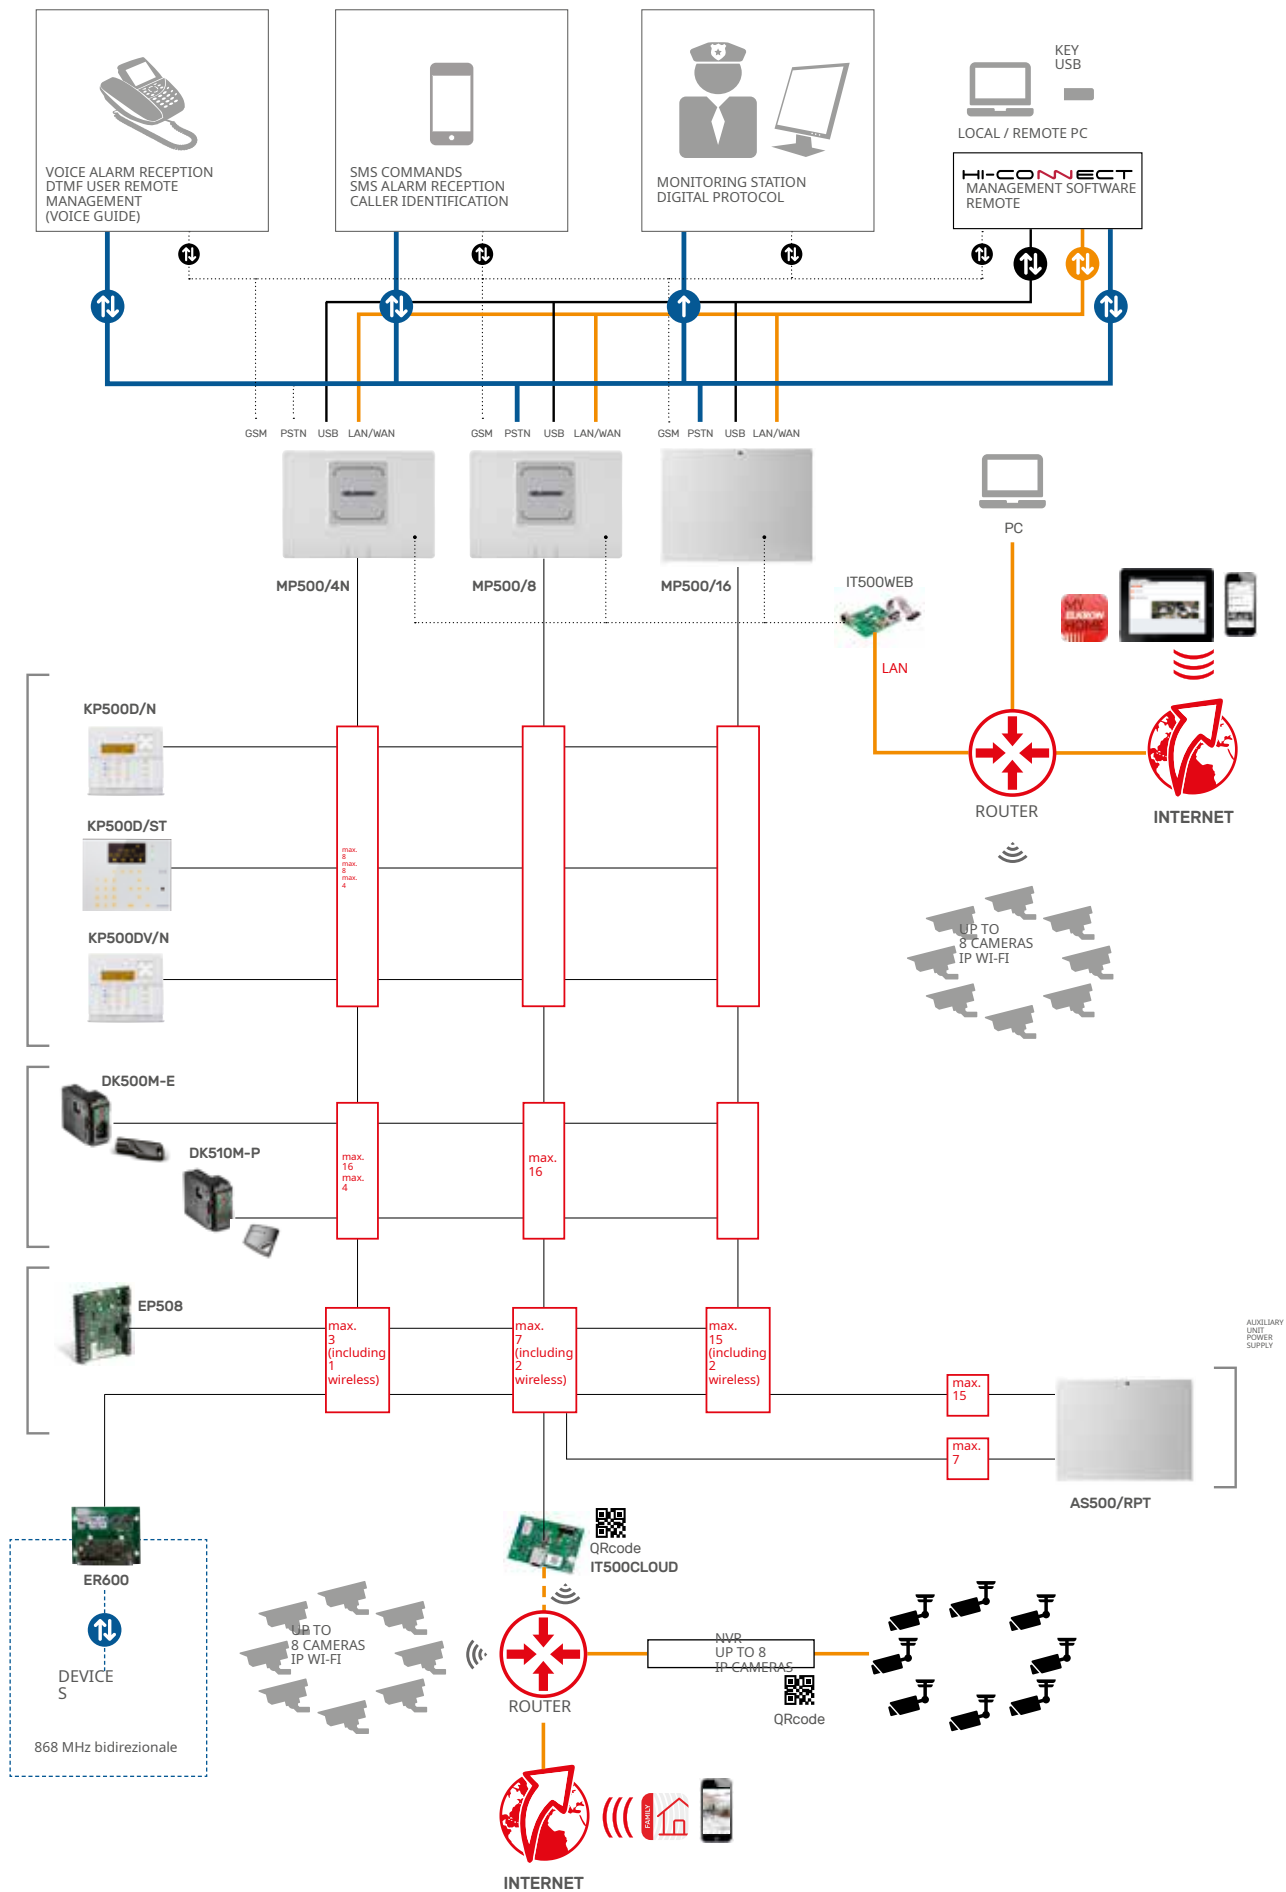


MP500/4N: FROM 4 TO 32 INPUTS


Flexible and customizable

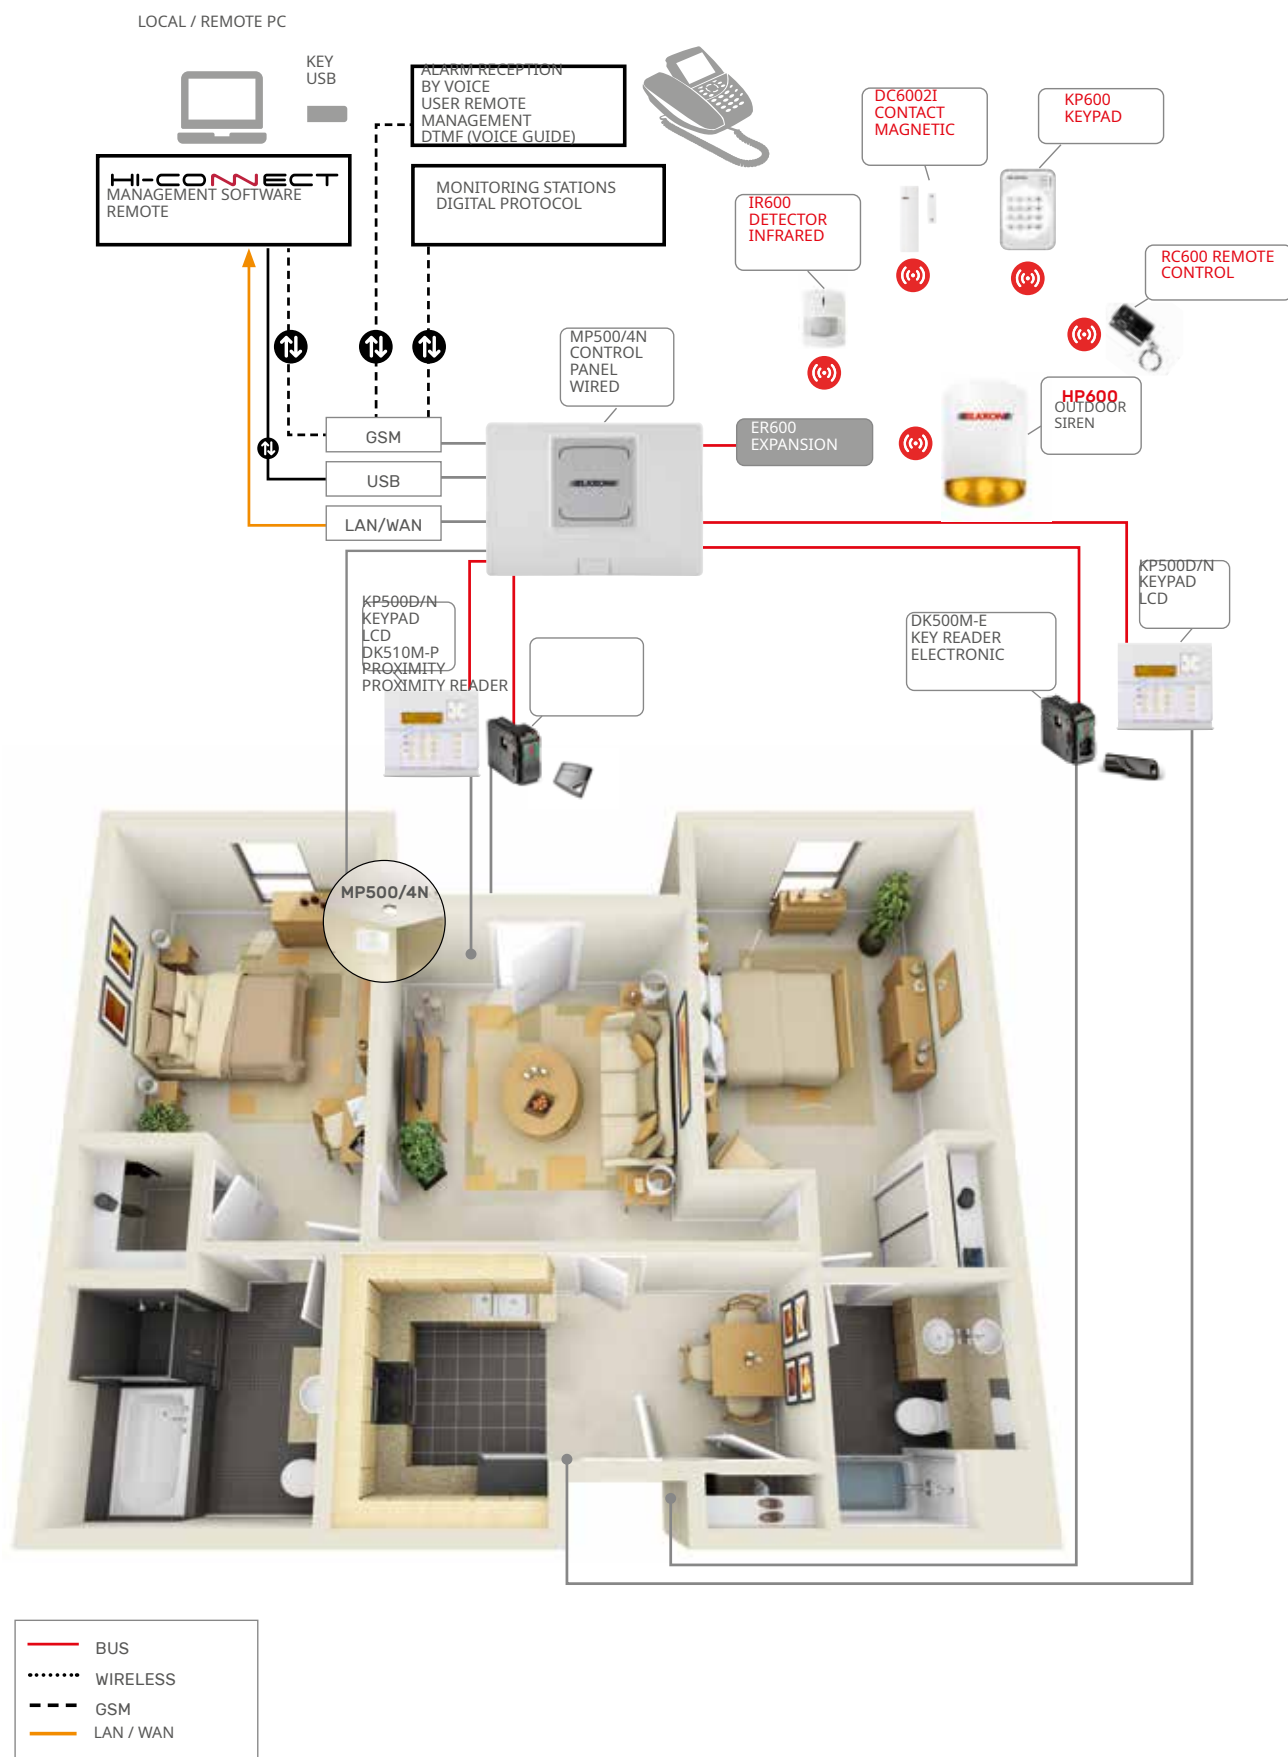

**The security of a permanent connection: by telephone, LAN/
WAN or HI-CONNECT
MP500/8: FROM 8 TO 64 INPUTS**

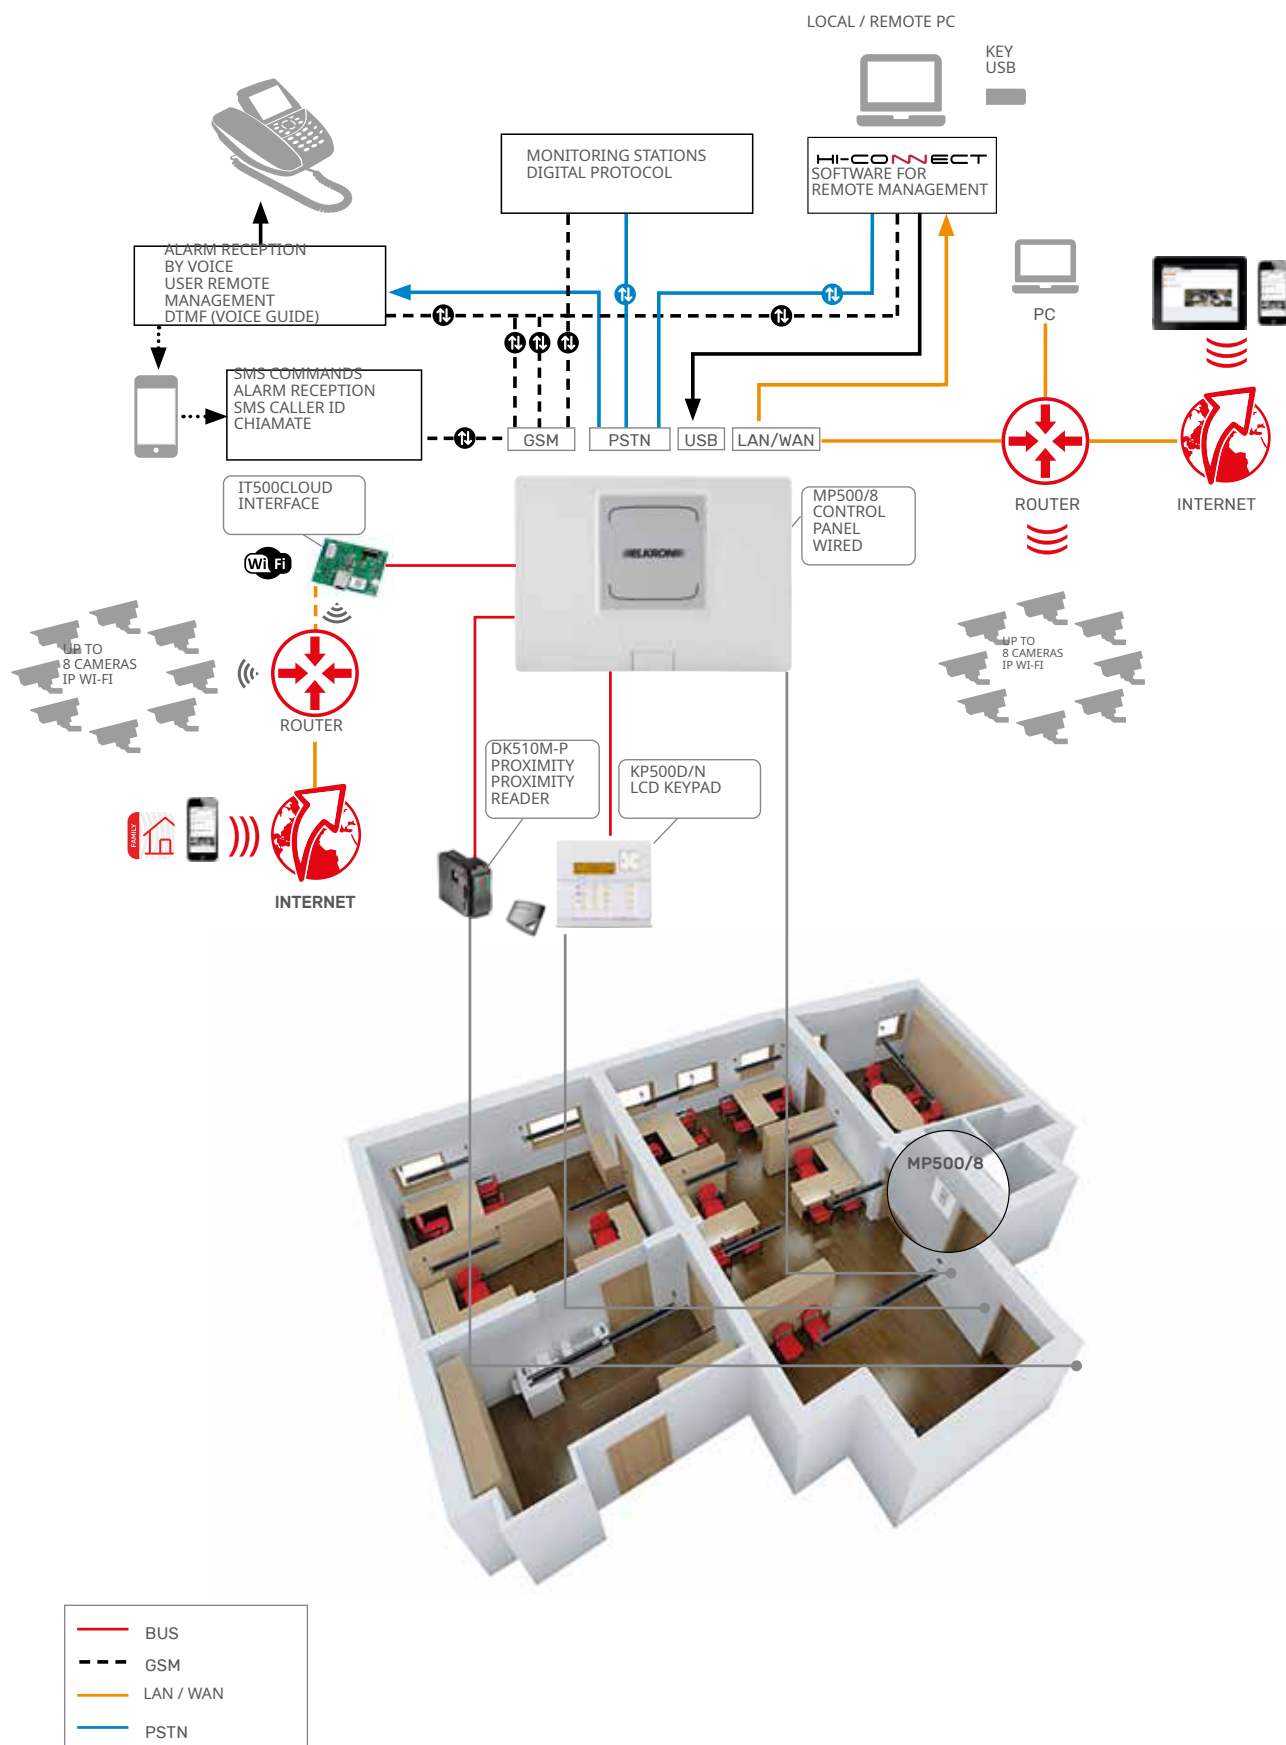

MP500/16: FROM 8 TO 128 INPUTS

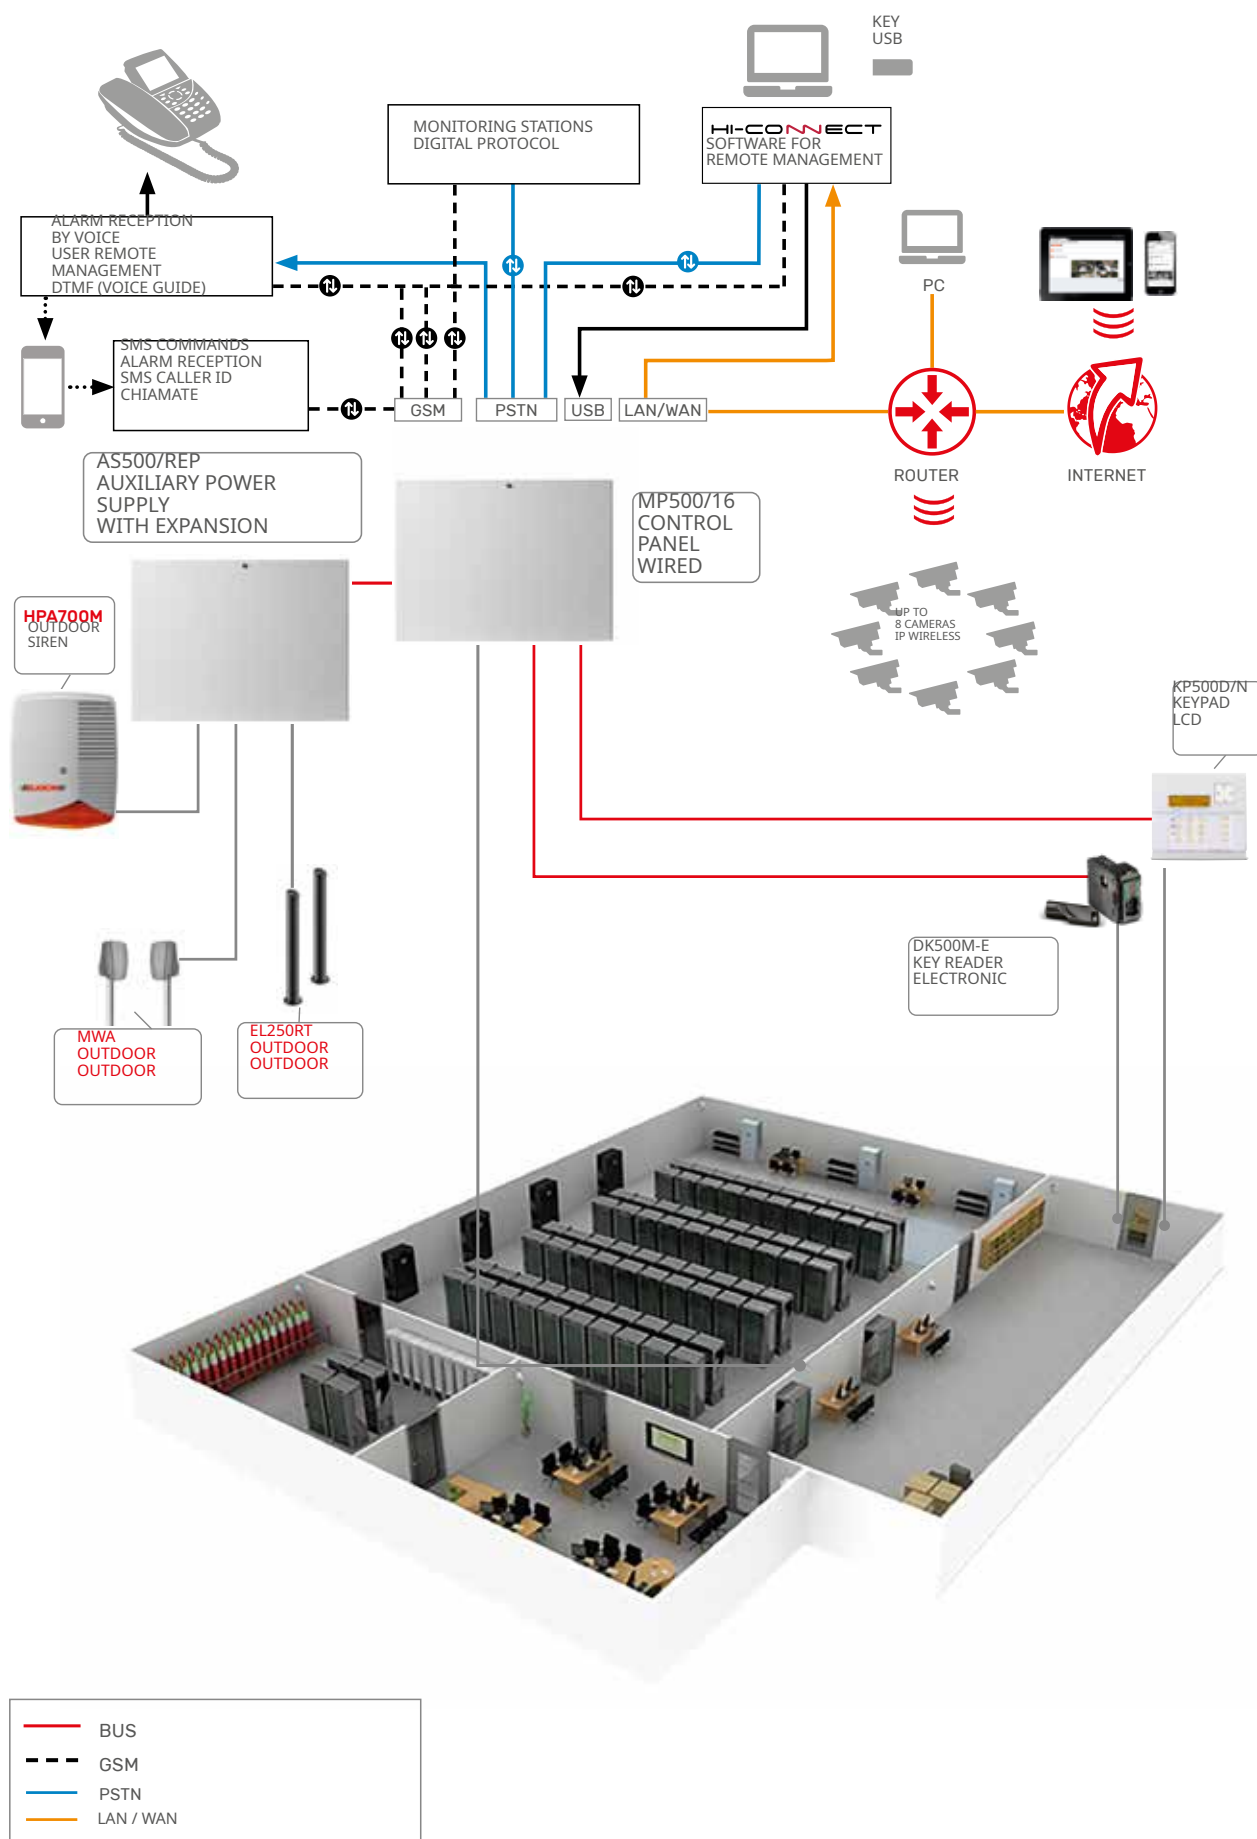

PRODUCT RANGE



**CONTROL
PANEL**
MP500/4N
item no.
80MP1N00111



- 8 zones expandable up to 32
- 4 independently armable sectors
- ✓ Local (USB) and remote (modem) PC programming
- ✓ Video management, wireless integration and IMG500 module management, accessible via Internet
- ✓ Integrated 1.5 A power supply
- EN50131 Grade 2 certified

✓
✓



**CONTROL
PANEL**
MP500/8
item no.
80MP4L00111



- 8 zones expandable up to 64 with integrated telephone communicator
- ✓ 8 independently armable sectors
- Local (USB) and remote (modem/LAN) PC programming
- ✓ Video function accessible via Internet
- Integrated 1.5 A power supply
- ✓ EN50131 Grade 3 certified

✓
✓



**CONTROL
PANEL**
MP500/16
item no.
80MP5L00111



- 8 zones expandable up to 128 with integrated telephone communicator
- ✓ 16 independently armable sectors
- Local (USB) and remote (modem/LAN) PC programming
- ✓ Video function accessible via Internet
- Integrated 3.4 A power supply
- ✓ EN50131 Grade 3 certified

✓
✓



**REMOTE KEYPAD
WITH LCD DISPLAY**

KP500D/N
item no.
80KP7100111



- 2-line, 16-character alphanumeric LCD display
- 9 system-status LEDs
- ✓ 12 alphanumeric keys, 7 navigation keys, 3 quick-command keys
- ✓ 2 auxiliary inputs
- Protection against opening and removal
- ✓ Powered from the control-panel bus
- ✓ EN50131 Grade 3 certified

✓
✓



**REMOTE KEYPAD
WITH LCD DISPLAY
AND VOICE
SYNTHESIS**

KP500DV/N
item no.
80KP7200111



- 2-line, 16-character alphanumeric LCD display
- 9 system-status LEDs
- ✓ 12 alphanumeric keys, 7 navigation keys, 3 quick-command keys
- ✓ Microphone, loudspeaker and voice connection
- Protection against opening and removal
- ✓ Powered from the control-panel bus
- ✓ EN50131 Grade 3 certified

✓
✓



TOUCH KEYPAD

DK500D/ST
item no.
80KP7600111



- OLED graphic display with brightness adjustment
- 7 navigation keys, 4 function keys, 12 alphanumeric keys
- 4 status LEDs
- ✓ 2 auxiliary inputs
- Proximity sensor
- ✓ Powered from the control-panel bus
- ✓ EN50131 Grade 3 certified

✓
✓
✓



KEY READER ELECTRONIC (FOR DK50 KEY)

DK500M-E
item no.
80DK5000211

- 5 LEDs: 4 for system status + 1 alarm memory
- ✓ 2 programmable onboard inputs

✓

White version available
DK500M-E/B item no. 80DK5100211



PROXIMITY KEY PROXIMITY READER (FOR DK70 KEY)

DK510M-P
item no.
80DK6200111

- 5 LEDs: 4 for system status + 1 alarm memory
- ✓ 2 programmable onboard inputs

✓

White version available
DK510M-P/B item no. 80DK6300111



ELECTRONIC KEY DIGITAL

DK50
item no.
80DK5400211



MIFARE PROXIMITY KEY

item no.
80DK6400111



MODULE GSM/GPRS

IMG500/N
item no.
80CT5510111

- Connects MP500/8 and MP500/16
- ✓ control panels to the GSM telephone network
- ✓ Dual-band GSM transmitter/receiver (900/1800 MHz)



BOARD FOR VOICE SYNTHESIS

SV500N I/F/GB
item no.
80CT6610111


- Three selectable languages: ITALIAN / ENGLISH
- ✓ FRENCH
- Audio bus for voice and ambient-listening functions via keypad (KP500DV/N)
- ✓ Voice guidance for remote DTMF commands
- ✓



TELEPHONE LINE INTERFACE PSTN TELEPHONE

ILT500-N
item no.
80CT6920115

- ✓ For MP500/4N control panel (or as a replacement for all MP500 control panels)



SOFTWARE FOR CONFIGURATION HI-CONNECT

item no.
80SW2400111

- ✓ Software application for Elcron control panels
- ✓ Compatible with Windows operating systems



REMOTE ANTENNA

ANTENNA GSM 1
item no.
80AN0300111

- Complete with bracket, wall plugs and 5 m cable
- ✓ terminated with an SMA-M connector compatible with the IMG500/N GSM module



ANTENNA FOR ENCLOSURE METAL

ANTENNA GSM 2
item no.
80AN0400111

- Antenna for metal enclosure with SMA-M
- ✓ connector, compatible with IMG500/N module
- For use with the IMG500 GSM module inside the MP500/16 control panel
- ✓

PRODUCT RANGE



INTERFACE WEB SERVER

IT500WEB
item no.
80IT2710111

- Integrated web-server function for connecting MP500 control panels to the LAN through an ADSL modem/router
- Up to 8 IP cameras freely assignable to one or more control-panel inputs
- ✓ User management through the My Elkron Home app
- ✓ Remote configuration by the installer
- ✓



IOT INTERFACE FOR MP500/8 CONTROL PANEL

IT500CLOUD
item no.
80IT2610111

- Connected to the MP500/8 system bus on one side and to the home router (LAN or Wi-Fi) on the other
- ✓ User management of intrusion / video / home-automation functions through the My Elkron Family app
- ✓ Up to 8 IP cameras on the same LAN as the control panel or via NVR, freely assignable to one or more control-panel inputs
- ✓



USB INTERFACE

IT USB/KEY
item no.
80MP5K10111

- Connects the control panel to a PC for system configuration
- ✓ Can accept a USB flash drive for data backup and firmware updates



INTERFACE ETHERNET

ETHERNET INTERFACE
item no. 80IT1200111

- ✓ Allows networks of MP500 control panels to be managed using remote supervision applications



WIRED BUS EXPANSION

EP508
item no.
80MP7K00211

- 8 programmable inputs + 1 dedicated 24H tamper input
- ✓ 3 programmable outputs (1 relay + 2 electronic)
- ✓ 1 tamper input
- ✓ EN50131 Grade 3 certified
- ✓



POWER SUPPLY AUXILIARY ON BUS

AS500/REP
item no.
80MP4J00111

- 3.4 A power supply
- ✓ Provision for 18 Ah battery
- ✓ 8 programmable inputs + 1 dedicated 24H tamper input
- ✓ 3 programmable outputs (1 relay + 2 electronic)
- ✓ 1 tamper input
- ✓



ABS ENCLOSURE WALL-MOUNTED

item no.
80MP6J00111

- Protects a wired EP508 expansion or IT500CLOUD interface
- ✓ Provision for a wired EP508 or radio ER600 expansion
- Protected against opening and removal



WALL-MOUNT ABS ENCLOSURE

item no.
80MP4J00111



- ✓
- ✓



RADIO EXPANSION ON BUS

ER600
item no.
80WL2410111

- Ultra-fast narrow-band FSK bidirectional radio communication
- Frequency: 868.6375 MHz
- ✓ Radio range: 2 km (without reflections and/or attenuation)
- ✓



REMOTE CONTROL

RC600 item no.
80TX4400113



- 4 keys (full ON/OFF / 1 programmable partial / panic alarm)
- ✓ Sliding key-protection cover
- ✓ Transmission/reception LED
- ✓ Batteries supplied
- ✓ Low-battery indication
- ✓



LED KEYPAD

KP600 item no.
80KP5500113



- ✓ Full ON/OFF / 1 programmable partial / panic alarm controls
- ✓ System-status LED
- ✓ Generates supervision signals at regular intervals to check device operation
- ✓ Batteries supplied



MICROCONTATTO

DC600 item no.
80MM1E00113



- ✓ High-speed signal transmission
- ✓ Installs on door and window frames
- ✓ Generates supervision signals at regular intervals to check device operation
- ✓ High-strength magnet
- ✓ Built-in LED feedback
- ✓ Long-life lithium battery included

Brown version
available item no.
80MM1H00113



MICRO-CONTACT WITH AUXILIARY INPUTS

DC6002I item no.
80MM1G00113



- ✓ Two wired inputs for connecting a contact and a wired micro-contact for roller shutters
- ✓ High-speed signal transmission
- ✓ Generates supervision signals at regular intervals to check device operation
- ✓ Built-in LED feedback
- ✓ Long-life lithium battery included

Colour version available
marrone item no. 80MM1H00113
ANTI
TAMPER
ENERGY
SAVING



MAGNETIC MICRO- CONTACT WITH SHOCK OR VIBRATION DETECTOR

DC600S item no.
80MM1L00113



- ✓ High-speed signal transmission
- ✓ Installs on door and window frames
- ✓ Generates supervision signals at regular intervals to check device operation
- ✓ Sensitivity adjustment
- ✓ Built-in LED feedback
- ✓ Long-life lithium battery included

Brown version
available item no.
80MM1M00113



INDOOR INFRARED DETECTOR

IR600 item no.
80IR2E00113



- ✓ High-speed signal transmission
- ✓ Two selectable sensitivity levels
- ✓ White-light protection
- ✓ Detection range 12 metres at 110°
- ✓ Generates supervision signals at regular intervals to check device operation
- ✓ Built-in LED feedback and test button
- ✓ Insect intrusion protection
- ✓ Automatic temperature compensation sensor
- ✓ Long-life lithium battery included



INDOOR PET-IMMUNE INFRARED DETECTOR

IRP600 item no.
80IR5D00113



- ✓ Two selectable sensitivity levels
- ✓ White-light protection
- ✓ 12 m detection range over 110°
- ✓ Pet discrimination: up to 27 kg within 7 m
- ✓ Generates supervision signals at regular intervals to check device operation
- ✓ Integrated LED feedback and test button
- ✓ Insect protection
- ✓ Automatic temperature compensation sensor
- ✓ Long-life lithium battery supplied



PRODUCT RANGE

CURTAIN
INFRARED
DETECTORIRT600 item no.
80IR1F00113

- High-speed signal transmission
- Two selectable sensitivity levels
- ✓ White-light protection
- ✓ Detection range 8 metres at 110°
- ✓ Generates supervision signals at regular intervals to check device operation
- ✓ Insect intrusion protection
- Automatic temperature compensation sensor
- ✓ Long-life lithium battery included

INDOOR
DUAL-TECHNOLOGY
DETECTORIM600 item no.
80IM3900113

- Combines IR and microwave technologies 10.525GHz
- High-speed signal transmission
- ✓ High RFI/EMI protection
- Self-adaptive detection range: 3 to 12 m/110°
- ✓ Generates supervision signals at regular intervals to check device operation
- ✓ Automatic temperature compensation sensor
- Wall or corner mounting
- Self-diagnostics
- ✓ Status display via three LEDs
- Long-life batteries included

OUTDOOR
DUAL-INFRARED
PET-IMMUNE
DETECTOREIR600 item no.
80IR2F00113

- Wall/corner installation, 40mm supplied swivel bracket
- ✓ Pet immunity sensitivity programmable on 4 levels: low (75 cm/60 kg), medium (60 cm/40 kg), high (45 cm/30 kg) and very high (30 cm/20 kg)
- ✓ Generates supervision signals at regular intervals to check device operation
- Automatic adjustment according to temperature
- ✓ and brightness
- Built-in LED feedback
- ✓ Batteries included

DUAL-TECHNOLOGY
DETECTOR
TECHNOLOGY
CURTAIN EFFECTDT600 item no.
80IM4100113

- Microwave frequency 24.1GHz
- High-speed signal transmission
- ✓ Sensitivity adjustment
- ✓ White-light protection
- ✓ Detection range 8 metres
- ✓ Generates supervision signals at regular intervals to check device operation
- ✓ Insect intrusion protection
- ✓ Automatic temperature compensation sensor
- Long-life batteries included

DUAL-TECHNOLOGY
WINDOW-CENTRE
DETECTORDT610 item no.
80IM4600113

- High-speed signal transmission
- ✓ Sensitivity adjustment
- ✓ White-light protection
- ✓ 3 m detection range
- ✓ Roller-shutter discrimination



- Generates supervision signals at regular intervals to check device operation
- ✓ Insect protection
- ✓ Automatic temperature compensation sensor
- ✓ Long-life batteries supplied

Brown version available
item no. 80IM4700113



ELR60 BARRIER

ELR60RT2PH/60
item
no. 80EL2900111



- Pair of dual-beam barriers, range 60 m
- ✓ High-speed signal transmission
- ✓ Generates supervision signals at regular intervals to
- ✓ check device operation
- Outdoor range 60 m
- ✓

- Transmitted signals: Alarm/Tamper/Low battery
- ✓ Programmable optical synchronization on 4 channels
- ✓ Automatic temperature compensation sensor
- ✓ Long-life batteries included
- ✓



MINI WIRELESS INFRARED BARRIER



- Models: 1 / 1.5 / 2 m high
- High-speed signal transmission
- ✓ Generates supervision signals at regular
- ✓ intervals to check device operation
- ✓ Maximum range 10 m
- Alarm programming for beam interruption: OR or AND of two beams
- ✓ Two-level crossing sensitivity
- ✓
- ✓

ELR600RT/10 item
no. 80EL3000111

ELR600RT/15 item
no. 80EL3100111

ELR600RT/20 item
no. 80EL3200111

IP54



- Optical synchronization
- ✓ Automatic temperature compensation sensor
- ✓ temperature
- Long-life batteries supplied
- ✓

ROTATION KIT ELR600RT

KIT for ELR600 item
no. 80EL3200111



OUTDOOR SIREN WITH FLASHING LIGHT

HP600 item no.
80HP8A00113



- Programmable siren cycle: 3, 5 or 10 min
- ✓ Generates supervision signals at regular intervals to
- ✓ check device operation

- UV protection
- ✓ Anti-jamming protection
- ✓ System status indicator
- ✓ Batteries supplied
- ✓



INDOOR IP/WI-FI 2 MP CUBE CAMERA

TC19
item no.
80TC1U00133

- Fixed 2.8 mm lens, 108° HFOV
- Sony Starlight sensor for colour night vision
- ✓ 10 IR LEDs for B/W night vision
- ✓ Micro SD slot (max. 64 GB)
- H.264/H.265 video compression up to
- ✓ 1920x1080@20fps
- ✓ Power supply included
- ✓
- ✓



OUTDOOR IP/WI-FI 2 MP POE BULLET CAMERA

TC20/N
item no.
80TC1V00133

- Autofocus lens 2.8-12 mm
- ✓ Sony Starlight sensor for colour night vision
- ✓ IR LEDs for B/W night vision up to 30 m
- Micro SD slot (max. 64 GB)
- ✓ H.264/H.265 video compression up to
- ✓ 1920x1080@20fps
- ✓ IP66



CAMERA ACCESSORIES
TC20

JUNCTION BOX SP/TEL
item no. 80TC1W00133

POWER SUPPLY PS/TEL
item no. 80PS5800133

TECHNICAL SUPPORT SERVICE (STAC)

For Elkron, attention to service is both a goal and a resource. Elkron is committed to meeting customer needs through high-quality systems and services, with fast response times and reliable solutions, including for specific customized requirements.

The Elkron Technical Support Service provides support for Elkron security solutions:
Consulting on hybrid, Wireless and fire detection intrusion systems

- ✓ Technical product information
- ✓ Diagrams and technical documentation
- ✓ Online support for product installation and setup
- ✓

The Elkron Technical Support Service (STAC) is available Monday to Friday from 8:00 to 13:00 and from 14:00 to 17:50.

Telephone number reserved for installers:

☎ (+39) 011 39 86 711

✉ stac@elkron.it



TECHNICAL SERVICE CENTRES

To find the nearest Technical Service Centre, scan the QR code with your smartphone or visit www.elkron.it



SALES ORGANIZATION

To find the nearest sales office, scan the QR code with your smartphone or visit www.elkron.com

Elkron is a trademark of Urmet S.p.A.

Urmet S.p.A. reserves the right to modify its equipment
at any time without prior notice.

www.elkron.it
info@elkron.it

Printed by: Servizi Tipografici Carlo Colombo - Rome

Printed in April 2020



SECURITY



Elkron is a trademark of Urmet S.p.A
Via Bologna, 188 C
10154 Turin (Italy)

 (+39) 011 39 86 711
 info@elkron.it
www.elkron.it

